



- Three phase 380/440VSC power noise filter
- Rated current: 100A-200A
- Small size, easy to install

## Specification

- Rated Voltage: 220~440VAC
- Working frequency: 50/60HZ
- Rated current: 100A-200A
- Withstand test voltage: 2750VAC
- Temperature range: -25°C~85°C
- Certificate: CE,ROHS
- Fire resistance: UL 94V-0


## Characteristic

- Integrated design, small size, high cost performance, convenient and quick installation.
- With high quality capacitor and High permeability Mn-Zn ferrite magnetic ring, excellent performance.
- It is good effective to solve the high frequency interference of 10Mhz to 30MHZ.
- There are a variety of parts combination collocation, to meet the requirement for testing different equipment.
- Can be customize according to customer requirements.


## Application

- Three phase system service.
- Three-phase power electronic equipment

## Products size

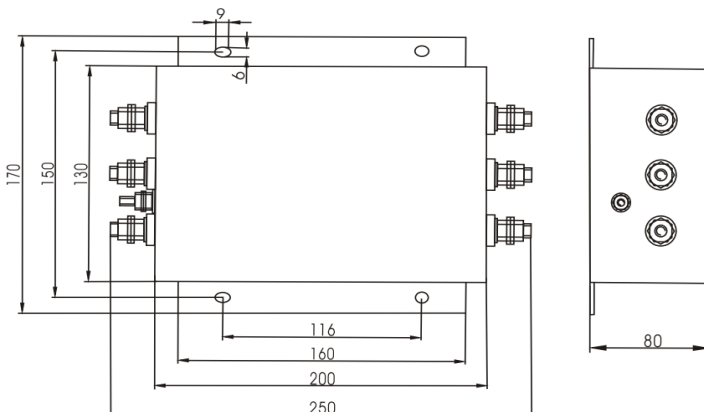

## Electric schematic

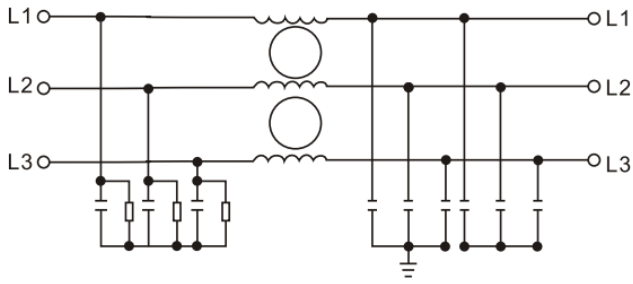

## Specification

Model No. (A)	Rated current(A)	leakage current(mA)	Inductance (mH)	Capacitor		Resistor [k Ω]	Weight (g)
				Cx [pF]	Cy [nF]		
DAC6-100A	100	≤1.5	1.0	0.47	4.7	1000	3500g
DAC6-125A	120	≤1.5	1.2	0.47	4.7	1000	3500g
DAC4-150A	150	≤1.5	0.6	0.47	4.7	1000	3500g
DAC4-200A	200	≤1.5	0.8	0.47	4.7	1000	4000g

## Insertion loss

Specification		Frequency (MHz)					
		0.15	0.5	1	5	10	30
DAC6-125A	Common mode (dB)	36	50	50	51	55	59
	Differential mode (dB)	17	40	55	70	63	50
DAC4-150A	Common mode (dB)	30	43	55	53	55	60
	Differential mode (dB)	20	47	65	62	58	50
DAC4-200A	Common mode (dB)	26	35	41	50	58	50
	Differential mode (dB)	20	45	60	65	66	50

# Insertion Loss

———— ( Common Mode )    - - - - - ( Differential Mode )

