


Technical Data


Rated Voltage	115/250VAC
Line Frequency	50/60Hz
	1500VDC(line/line)
Test Voltage	2250VAC (line/ground)
Insulation Resistance	> 500M Ω @500VDC
Temperature Rise	< 30℃
Climatic category	25/085/21

Three phase EMI filter			
DAC42-Series EMI FILER	Chengdu Mengsheng Electronic CO., LTD		
	Level	quantity in one package	Weight
	Industrial grade	20PCS	28KG

Electrical Schematics

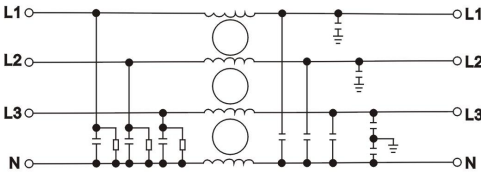

Outline Drawing and Dinensions(mm , ± 1 mm)

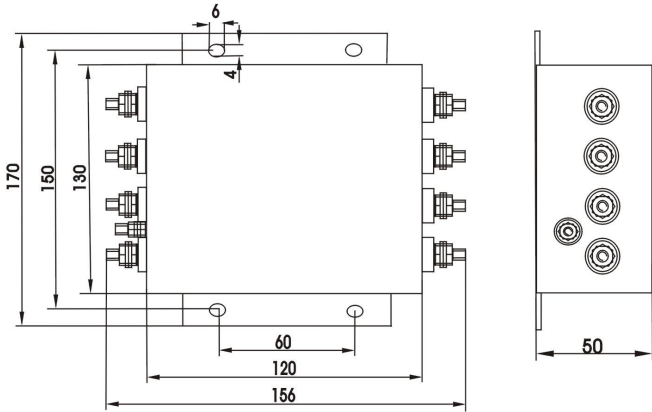

Components Parameters

Product model	electric capacity (X2)	electric capacity (Y2)	Inductance (L)	Remark
DAC42-40A	0.47 μ F	2200pF	0.7mH	Parameters support customization
DAC42-50A	0.47 μ F	2200pF	0.5mH	Parameters support customization
DAC42-60A	0.47 μ F	2200pF	0.4mH	Parameters support customization
DAC42-80A	0.47 μ F	2200pF	0.2mH	Parameters support customization

Insertion Loss

———— (Common Mode) - - - - - (Differential Mode)

